


Burettes, straight stopcock

Hirschmann Laborgeräte



612-3526

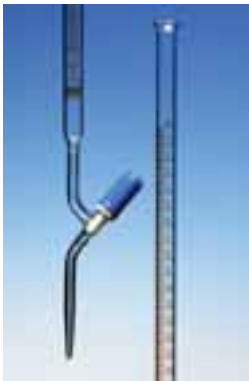

612-3529

DURAN®, borosilicate glass class B

- Calibrated to deliver 'Ex'
- Short marks at major graduations, black graduations

DIN 12 700 T2

Scale length : 500 mm

Capacity (ml)	Division (ml)	Tolerance (± ml)	Pk	Cat. No.
Straight stopcock with glass key				
10	0,02	0,03	1	612-3526
25	0,05	0,045	1	612-3527
50	0,1	0,075	1	612-9810
Straight valve stopcock with PTFE spindle				
10	0,02	0,03	1	612-3529
25	0,05	0,045	1	612-3531
50	0,1	0,075	1	612-3532

Burettes, straight stopcock, PYREX®



Borosilicate glass with interchangeable PTFE key, Class B

- Calibrated to deliver 'Ex'
- PTFE key for grease free performance
- White enamel graduations for good visibility with dark coloured solutions

ISO 385

Capacity (ml)	Division (ml)	Tolerance (± ml)	Pk	Cat. No.
10	0,02	0,05	1	612-3955
25	0,10	0,10	1	612-3956
50	0,10	0,10	1	612-3957
100	0,20	0,20	1	612-3958

Burettes, straight stopcock, PTFE spindle, MBL®



Pyrex® borosilicate glass, class B

- Calibrated to deliver 'Ex'
- With GP Rotaflo®, stopcock which has a PTFE key, requiring no lubrication
- Provides fine drop control, no seizure with caustic solutions
- Graduations in permanent amber stain

ISO 385

Capacity (ml)	Division (ml)	Tolerance (± ml)	Pk	Cat. No.
10	0,1	0,1	1	612-3254
25	0,1	0,1	1	612-3256
50	0,1	0,1	1	612-3257
100	0,2	0,2	1	612-3258