


AUTO-ANALYSER CUPS

Auto-analyser cups

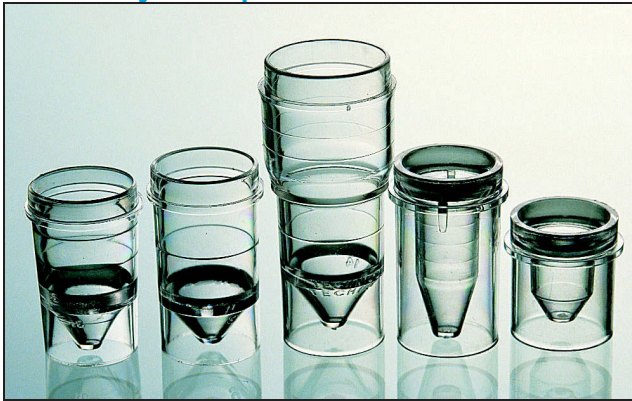


Crystal clear polystyrene, graduated, conical vessel base with skirt. Supplied **without caps**.

Style	Cap. (ml)	Pk	Cat. No.	/ 10+	£
Gemsec	0.50	1000	212-6106	27.51	29.63M
Technicon	1.5	1000	212-0007	18.04	19.70M
Technicon	2.0	1000	212-6120	19.05	20.81M
Technicon	4.0	1000	212-6126	33.19	36.24M

Caps, polyethylene. For use with auto-analyser cups 212-6106 & -2120.

Pk	Cat. No.	/ 10+	£
1000	212-6107	16.73	18.32M

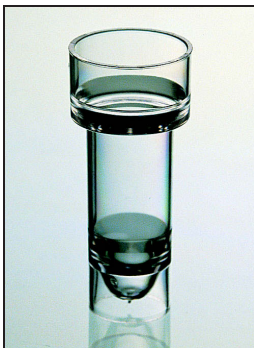

Auto-analyser cups

Non-graduated cups for *Hitachi* 705, 706, 712.

Pk	Cat. No.	/ 10+	£
1000	212-6108	33.51	36.09M

Micro test tubes with caps for Cobas-Bio®

Kartell



- Made of high density polyethylene; dimensions 7.65 x 35.5 mm (Ø x h)
- 4 colours, bags of 1000 micro test tubes

Colour	Pk	Cat. No.	£
neutral	1000	211-5811	23.99M
blue	1000	211-5812	23.99M
yellow	1000	211-5813	23.99M
pink	1000	211-5814	23.99M

Bottles, dilution

NALGENE®



For serial dilutions. Leak-proof PP closure. Autoclavable with opened closure. Two different materials:

Polysulfone, Polypropylene Screw Closure. Transparent. Excellent resistance against weak acids, bases and aqueous solutions. With useful temperature range of -100°C to +165°C. Autoclavable, but when used with Tween will reduce the life of the bottle. Accurate to ± 1 ml.

Polypropylene Copolymer, Polypropylene Screw Closure. Contact-clear, excellent resistance to strong acids, alcohols and bases. Useful temperature range of -40°C to +121°C. Withstands repeated washing and autoclaving with Tween. Accurate to ± 4 ml.

Description	Volume (nom.) (ml)	Closure (mm)	Pk	Cat. No.	£
Polysulfone	200	28	12	215-7801	58.00R
Polysulfone	205	38	12	215-7802	67.00R
PP-Copolymer	200	28	12	215-7811	55.00R
PP-Copolymer	205	38	12	215-7812	63.00R

Bottles, wide mouth, HDPE

NALGENE®

- Wide mouth for Easy cleaning

Translucent HDPE. Leafproof

Cap. (ml)	Closure (mm)	N. Ref.	Cat. No.	£
30	28	2189-0001	215-1033	34.15R
60	28	2189-0002	215-1034	39.15R
125	38	2189-0004	215-1035	44.65R
250	43	2189-0008	215-1036	62.40R
500	53	2189-0016	215-1037	61.50R
1000	63	2189-0032	215-1038	50.75R

2004
 prices held
 until
2006