

Continued from previous page

Type	With	Neck	Side necks (NS)	Pk	Cat. No.
4 Necks	flat flange DN 100	NS 29/32 (centre)	3×NS 29/32 straight	1	201-0133
4 Necks	flat flange DN 100	NS 29/32 (centre)	2×NS 29/32 angled + 1×NS 14/23 straight	1	201-0134
4 Necks	flat flange DN 150	NS 29/32 (centre)	3×NS 29/32 straight	1	201-0135
4 Necks	flat flange DN 150	NS 29/32 (centre)	3×NS 29/32 angled	1	201-0136
4 Necks	flat flange DN 150	NS 29/32 (centre)	2×NS 29/32 angled + 1×NS 14/23 straight	1	201-0137
4 Necks	flat flange DN 150	NS 45/40 (centre)	3×NS 29/32 angled	1	201-0138




Quick-release closures for flat flange connections
DURAN Group



- Stainless steel, rust-proof**
- For clamping reaction vessels and lids together
- Simple assembly and disassembly
 - With three holding segments
 - Quick release

For	Pk	Cat. No.
flat flanges DN 60	1	201-0191
flat flanges DN 100	1	201-0192
flat flanges DN 120	1	201-0193
flat flanges DN 150	1	201-0194
flat flanges DN 200	1	201-0195

Clamp locks for attaching reaction vessels to retort stands
Lenz

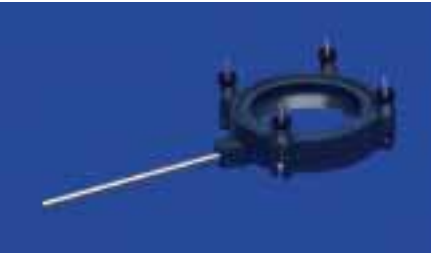

- Fibreglass-reinforced polyester**
- For securing a reaction vessel with a fixture using an attached rod onto a retort stand.
- Fast, easy assembly and disassembly
 - Very sturdy
 - Secure fixture holder on the reaction vessel

For	Pk	Cat. No.
flat flanges DN 60	1	201-1139
flat flanges DN 100	1	201-1140
flat flanges DN 150	1	201-1141



Reaction vessels, round bottom, with flat flange



- PYREX®, borosilicate glass**
- Wide neck allows easy incorporation of stirrer paddles and easy removal of solid residues.
- For use with Quickfit® flat flange lids and retaining clips
 - Very good chemical resistance
 - Minimal thermal expansion giving relatively high resistance to temperature changes

Capacity (ml)	With	Height (mm)	Pk	Cat. No.
250	flat flange 75 mm	90	1	201-8511
500	flat flange 75 mm	115	1	201-8545
700	flat flange 100 mm	135	1	201-8551
1000	flat flange 100 mm	155	1	201-8495
2000	flat flange 100 mm	185	1	201-8521
3000	flat flange 100 mm	210	1	201-8527
5000	flat flange 100 mm	245	1	201-8550
10000	flat flange 100 mm	320	1	201-8478
20000	flat flange 100 mm	380	1	201-8496