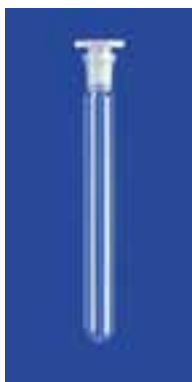


## Test tubes with standard ground stoppers

Lenz

**DURAN®**, borosilicate glass

With standard ground joint and HDPE stoppers, non graduated.

- Very good chemical resistance
- High temperature resistance
- Minimal thermal expansion, giving relatively high resistance to temperature changes

Length (mm)	Ø ext. (mm)	Socket size (NS)	Pk	Cat. No.
100	16	14/23	1	212-1622
160	16	14/23	1	212-1624
180	18	14/23	1	212-1626



## Test tubes with standard ground joints

**PYREX®**, borosilicate glass

With standard ground sockets.

- Very good chemical resistance
- High temperature resistance
- Minimal thermal expansion, giving relatively high resistance to temperature changes

Capacity (ml)	Length (mm)	Ø ext. (mm)	Socket size (NS)	Pk	Cat. No.
2	100	14	10/19	5	201-8619
10	100	17	12/21	5	201-8623
11	100	19	14/23	5	201-8620
19	100	23	19/26	5	201-8624
15	125	19	14/23	5	201-8621
19	150	19	14/23	5	201-8622
31	150	23	19/26	5	201-8625
54	150	29	24/29	5	201-8626
75	200	29	24/29	5	201-8627
195	250	41	34/35	5	201-8628

## Test tubes with standard ground stoppers

**PYREX®**, borosilicate glass, clear

Ground socket tubes with white enamel graduations to indicate capacity.

- Graduated
- Excellent chemical and thermal resistance
- Interchangeable PE stopper (included)

ISO 4142, DIN 12217

Capacity (ml)	Length (mm)	Ø ext. (mm)	Socket size (NS)	Division (ml)	Pk	Cat. No.
5	100	13	10/19	0,1	10	212-7432
10	125	18	14/23	0,2	10	212-7433
25	150	22	19/26	0,5	10	212-7399
50	200	26	24/29	1,0	10	212-7398