



#### Pump, liquid

Syphon. Similar to Cat.No.181-0305 but with greater flow rates. Adjustable bung allows the pump to be used with different containers.

For container:	Output (l/min)	Pk	Cat. No.	£
10-60 litres	8.5	1	181-0306	13.25N
200 litres	20	1	181-0307	22.90N

**Adapter, 2"** for 200 litre pump Cat. No.181-0307, enabling it to be used with plastic drums.

Type	Pk	Cat. No.	£
Tri-sure	1	181-0300	5.40N

A drum content gauge is available to enable the user to know accurately how much liquid remains in a 200 litre drum. Please enquire for further details.




#### Pump, liquid, for chemicals

Piston action, manufactured in polypropylene with no metal parts in contact with the liquid. Seals are PTFE (Teflon throughout), standard fitting 2" BSP. The 20/25 litre version delivers 1/3 litre per stroke, the 205 litre version 1/2 litre per stroke.

For containers, size (litre)	Pk	Cat. No.	£
20/25	1	181-0301	34.00N
205	1	181-0302	40.00N

**Adapter, 2"** for 205 litre pump Cat. No.181-0302, enabling it to be used with plastic drums.

Type	Pk	Cat. No.	£
Tri-sure	1	181-0300	5.40N
Mauser	1	224-0000	5.40N

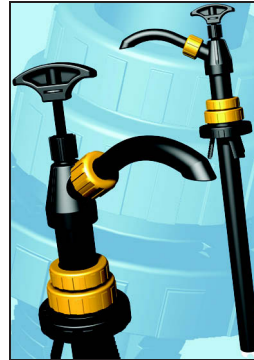

#### Pump, liquid, for solvents

Piston action, manufactured in nylon with no metal parts in contact with the liquid. Seals are PTFE (Teflon throughout), standard fitting 2" BSP. The 20/25 litre version delivers 1/3 litre per stroke, the 205 litre version 1/2 litre per stroke.

For containers, size (litre)	Pk	Cat. No.	£
20/25	1	181-0303	41.60N
205	1	181-0304	53.00N

**Adapter, 2"** for 205 litre pump Cat. No.181-0304, enabling it to be used with plastic drums.

Type	Pk	Cat. No.	£
Tri-sure	1	181-0300	5.40N
Mauser	1	224-0000	5.40N



#### Pumps, liquid, acid transfer

Self-venting pump constructed of polypropylene, with internal parts of high density polyethylene, for use with a wide range of chemicals. Fits drums with either 3/4" (19mm) or 2" (50mm) openings. Delivery of 16 ounces (480ml) per stroke. Supplied with extension tubing and clamps.

Pk	Cat. No.	£
1	181-0500	205.00M



#### Pump, liquid, heavy duty

- Easy to use - eliminates effort required in lifting and pouring from containers
- Safe - considerably reduces risk of splashing and spillage
- Convenient - includes adapters for most vessels

Pistonless displacement pump, discharging on the down stroke, with swivel anti-drip nozzle. Unit fits standard 2" BSP drum closure thread, and is supplied with adapters for 12mm (1/2") bore hose, Tri-sure buttress form plastic drums, and multi-adapter for raised screw neck closures. Telescopic dip-tube suits 25 to 210 litre drums. Suitable for disinfectants, detergents, herbicides, pesticides, de-greasing agents, acids, alkalis, biocides, oils, etc.

Description	Pk	Cat. No.	£
Pump, as described	1	181-0400	50.00N
Pump, as above but with viton sealing rings	1	181-0401	63.00N