

Burettes, straight stopcock Hirschmann Laborgeräte



DURAN®, borosilicate glass, class AS


- Calibrated to deliver 'Ex', conformity certified with dated batch identification
- Ring marks at major graduations, black graduations
- With glass key

DIN ISO 385

Scale length: 500 mm

Capacity (ml)	Division (ml)	Tolerance (± ml)	Pk	Cat. No.
10	0,02	0,02	1	612-3544
25	0,05	0,03	1	612-3546
50	0,1	0,05	1	612-3547

Burettes, straight stopcock, Schellbach stripe, PYREX®

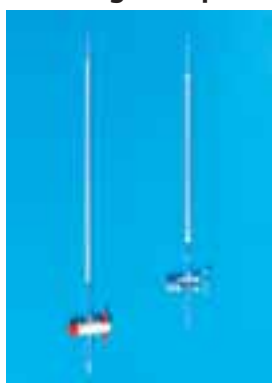

Borosilicate glass, Class AS

- Calibrated to deliver 'Ex', conformity certified with dated batch identification
- Funnel top to make filling easier and safer
- Graduations and inscriptions in blue enamel
- Choice of stopcock in glass or PTFE

ISO 385

Capacity (ml)	Division (ml)	Length (mm)	Pk	Cat. No.
Straight stopcock with glass key				
10	0,05	570	1	612-0218
25	0,1	570	1	612-0219
25	0,05	800	1	612-0220
50	0,1	800	1	612-0221
Straight stopcock with PTFE key				
10	0,05	570	1	612-0214
25	0,1	570	1	612-0215
25	0,05	800	1	612-0216
50	0,1	800	1	612-0217

Burettes, straight stopcock, PYREX®



Borosilicate glass with interchangeable PTFE key, Class AS

- Calibrated to deliver 'Ex', conformity certified with dated batch identification
- PTFE key for grease-free performance
- White enamel graduations for good visibility with dark coloured solutions

ISO 385

Capacity (ml)	Division (ml)	Tolerance (± ml)	Pk	Cat. No.
Class AS burettes				
10	0,02	0,02	1	612-3973
25	0,10	0,05	1	612-3974
50	0,10	0,05	1	612-3975
100	0,20	0,10	1	612-3976
Class AS burettes, works certified				
10	0,02	0,02	1	612-3959
25	0,10	0,05	1	612-3970
50	0,10	0,05	1	612-3971
100	0,20	0,10	1	612-3972